

FAZ 系列防水防尘防腐镇流器

Series Weatherproof Ballasts



Waterproof




Dustproof




Corrosionproof

Industrial and Mining Weatherproof Light Fittings
工矿用水防尘防腐灯具类

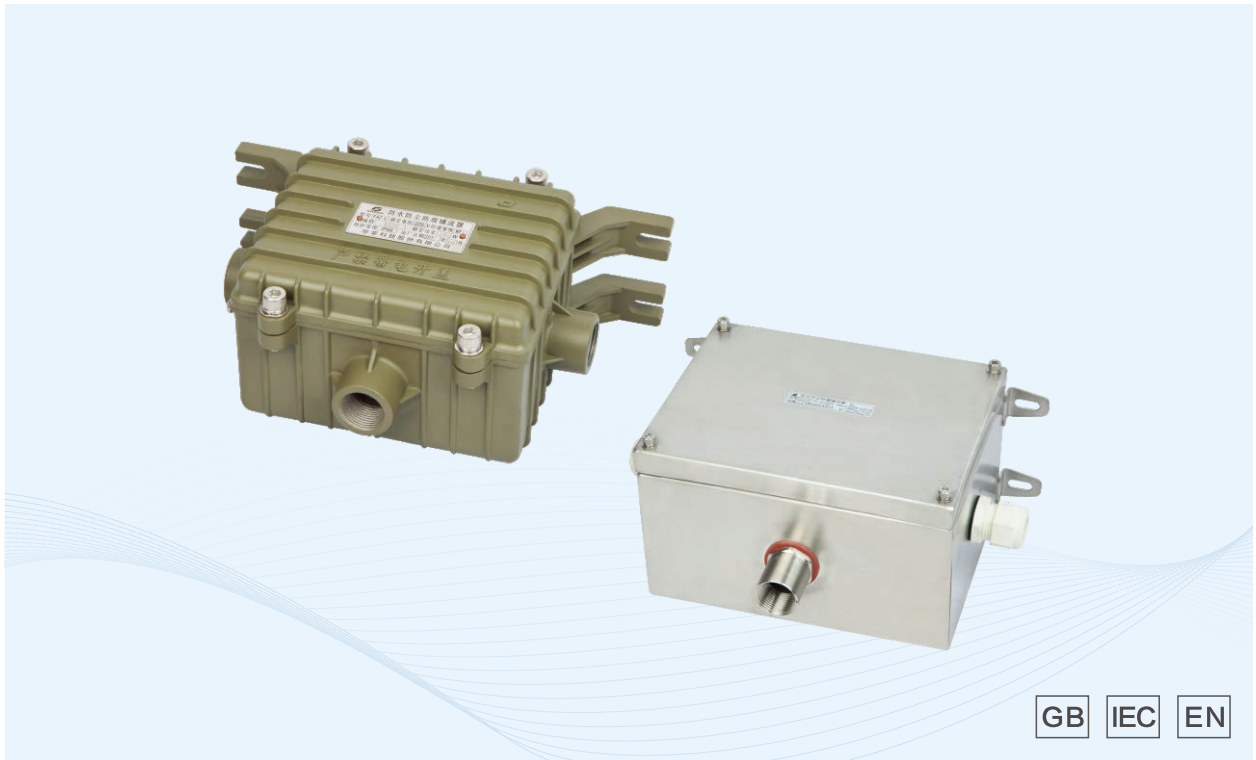

GB IEC EN

◆ 型号规格含义/Catalogue Number Logic

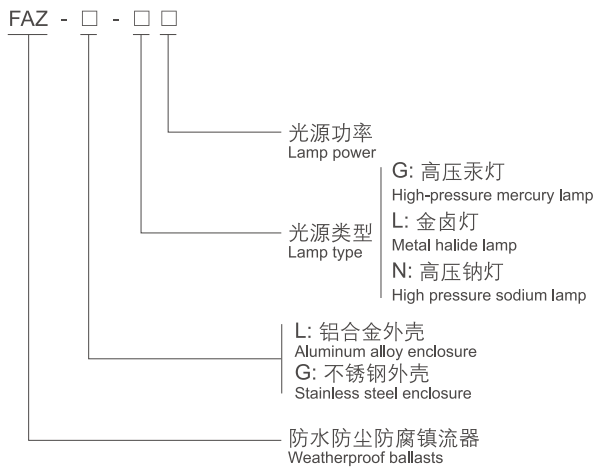

◆ 订货须知/Ordering Information

- ◇ 注明执行标准形式，如中国标准、国际标准、欧盟标准、北美标准
- ◇ 按照产品型号规格说明逐条选择，例如：FAZ-L-N250表示为高压钠灯250W，铝合金壳体，防水防尘防腐镇流器；
- ◇ 镇流器配套的光源建议选用华荣、飞利浦、欧司朗、亚明品牌；中国标准、国际标准、欧盟标准产品金卤灯250W、400W需配置欧标光源；
- ◇ 铝合金镇流器常规配置为钢管布线，如需电缆布线请注明；
- ◇ 不锈钢镇流器常规配置为电缆布线，如需钢管布线请注明。
- ◇ Specify the executive standard form, such as Chinese National standard, International standard, European standards American standards.
- ◇ Follow the product catalogue number logic for selection.
For example: FAZ-L-N250 means 250W high pressure sodium lamp, aluminum alloy enclosure, Weatherproof ballasts.
- ◇ Warom, Philips, Osram and Yaming lamps are recommended to match the ballast; European standard light source should be provided for Chinese national standard, International standard and European standard 250W and 400W metal halide lamp.
- ◇ Steel pipe wiring is provided for aluminum alloy ballast; please specify if cable wiring is needed
- ◇ Cable wiring is provided for stainless steel ballast, please specify if steel pipe wiring is needed.



Waterproof



Dustproof



Corrosionproof

Industrial and Mining Weatherproof Light Fittings
工矿用水防尘防腐灯具类

◆ 产品特点/Product features


- ◇ FAZ-L外壳采用铝合金压铸成型，表面高压静电喷塑，抗弱酸、弱碱腐蚀；
- ◇ FAZ-G外壳采用优质不锈钢材料折弯焊接而成，抗强酸、强碱、盐腐蚀，防水、防尘、防腐；
- ◇ 高防腐性能的不锈钢外露紧固件，硅橡胶密封件，耐油、耐酸、耐碱、耐高温；
- ◇ 与单盏灯具配套使用，兼做接线、分线箱；高功率因数， $\cos\Phi \geq 0.90$ ；
- ◇ 内装镇流器技术参数同飞利浦、欧司朗、亚明，建议用户配置华荣、飞利浦、欧司朗、亚明品牌光源；
- ◇ 防护等级IP66；引入装置 $\Phi 10\text{mm} \sim \Phi 14\text{mm}$ 。
- ◇ Die-casting aluminum alloy enclosure for FAZ-L, powder coated surface, weak acids and weak alkali resistance.
- ◇ FAZ-G enclosure is made of high quality stainless steel through bending and welding, with strong acid resistance, strong alkali resistance, salt corrosion resistance, waterproof, dustproof and corrosion-proof performance.
- ◇ Stainless steel exposed fasteners, with high corrosion-proof performance. Silicone rubber seals, anti-oil, anti-acid, anti-alkali, and high temperature resistance.
- ◇ Used as terminal box and branching box, together with single one lamp, High power factor, $\cos\Phi \geq 0.90$.
- ◇ The technical parameters of built-in ballast are the same as Warom, Philips, Osram and Yaming lamp, so Warom, Philips, Osram, Yaming lamp is recommended.
- ◇ Degree of protection IP66; Cable gland $\Phi 10\text{mm} \sim \Phi 14\text{mm}$.

◆ 产品规格/Product specifications

型号规格 Type	额定功率(W) Rated power	壳体类型 Enclosure type	重量(kg) Weight
FAZ-L-G80	80	I	2.8
FAZ-L-G125	125		3.27
FAZ-L-L70	70		2.95
FAZ-L-L100	100		3.47
FAZ-L-L150	150		3.78
FAZ-L-N70	70		2.97
FAZ-L-N100	100		3.42
FAZ-L-N110	110		3.38
FAZ-L-N150	150		3.66
FAZ-L-G175	175		3.63
FAZ-L-G250	250		3.77
FAZ-L-L250	250		3.97
FAZ-L-N250	250		7.3
FAZ-L-N400	400		9.1
FAZ-L-L400	400	7.5	
FAZ-L-G400	400	7.3	

型号规格 Type	额定功率(W) Rated power	壳体类型 Enclosure type	重量(kg) Weight
FAZ-G-G80	80	I	3.0
FAZ-G-G125	125		3.6
FAZ-G-L70	70		3.2
FAZ-G-L100	100		3.6
FAZ-G-L150	150		3.6
FAZ-G-N70	70		3.0
FAZ-G-N100	100		3.6
FAZ-G-N110	110		3.6
FAZ-G-N150	150		3.8
FAZ-G-G175	175		3.8
FAZ-G-G250	250		3.9
FAZ-G-L250	250		3.9
FAZ-G-N250	250		4.7
FAZ-G-N400	400		6.5
FAZ-G-L400	400	4.9	
FAZ-G-G400	400	4.7	

◆ 外形及安装举例/Outline and mounting type (mm)

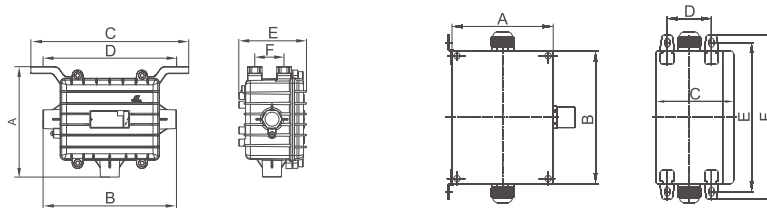

外壳类型 Enclosure	A	B	C	D	E	F	外壳类型 Enclosure	A	B	C	D	E	F
I 铸铝 Casting aluminum	203	256	270	240	116	50	I 不锈钢 Stainless steel	152	170	122	70	194	211
II 铸铝 Casting aluminum	224	306	300	270	136	60	II 不锈钢 Stainless steel	160	210	122	70	234	251