

# HR-ZLZD-E13W/HR-ZFZD-E5W 消防应急照明灯具

## Fire Emergency Light Fittings



Waterproof




Dustproof




Corrosionproof

Industrial and Mining Weatherproof Light Fittings  
工矿防水防尘防腐灯具类

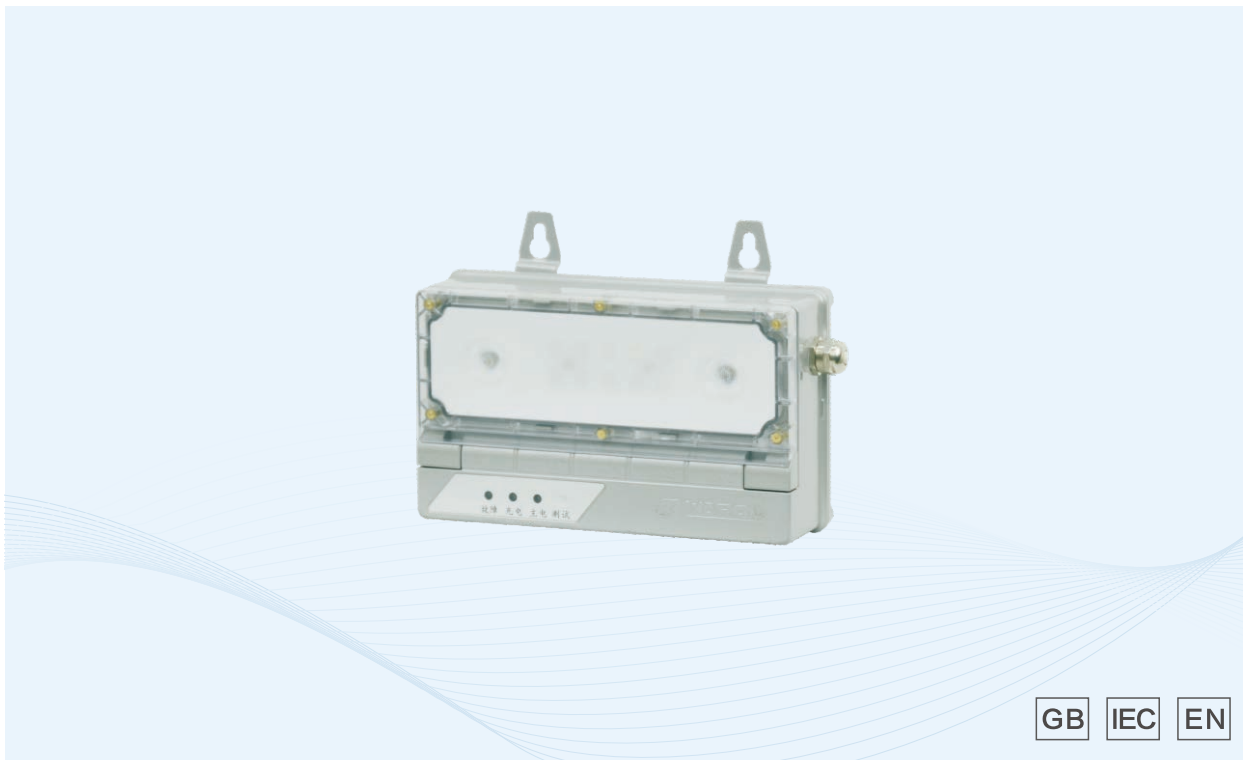

GB IEC EN

### ◆ 型号规格含义/Catalogue Number Logic

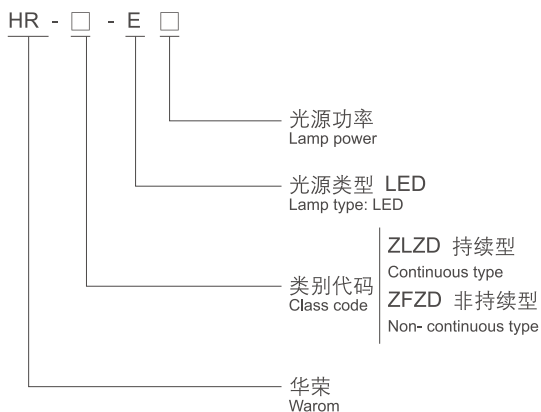

### ◆ 订货须知/Ordering Information

- ◇ 注明执行标准形式，如中国标准、国际标准、欧盟标准
- ◇ 按照产品型号规格说明逐条选择，例如：需要持续型工作方式的消防应急照明灯具，则产品选型为HR-ZLZD-E13W；
- ◇ 型号中“ZLZD”表示产品为持续型，正常工作及故障状态下，灯具均点亮；
- ◇ 型号中“ZFZD”表示产品为非持续型，正常工作下灯具不亮，故障状态下，灯具均点亮；
- ◇ 如需要手动切换并外接开关 订货时请注明。
- ◇ Specify the executive standard form, such as Chinese National standard, International standard, European standards.
- ◇ Follow the product catalogue number logic for selection.  
For example: fire emergency light fitting, continuous type, the product type shall be HR-ZLZD-E13W.
- ◇ ZLZD type which means continued type and the light fitting can be lighted in normal lighting and fault conditions.
- ◇ ZFZD type means non-continuous type, the light fitting cannot working under the normal lighting condition, and it can be lighted under fault conditions.
- ◇ If the outside switch is needed to switch manually, please specify when ordering.



Waterproof



Dustproof



Corrosionproof

Industrial and Mining Weatherproof Light Fittings  
工矿用水防尘防腐灯具类

### ◆ 技术参数/Technical parameters

执行标准 Executive standards	中国标准(GB)/Chinese National standards	国际标准(IEC)/International standards 欧盟标准(EN)/European standards
工作电压 Working voltage	220V AC 50Hz/60Hz	220V~240V AC 50Hz/60Hz
环境温度 Ambient temperature	-25℃~+45℃	
应急时间 Emergency time	10h	
防护等级 Degree of protection	IP65	
防腐等级 Corrosion-proof	WF1、WF2(可选/Optional)	
引入装置 Cable gland	适合Φ8mm ~ Φ12mm电缆 / Suitable for cable of Φ8mm ~ Φ12mm	
光源功率 Lamp power	HR-ZLZD-E13W: 13W / HR-ZFZD-E5W: 5W	
灯具重量 Wieght of Light fitting	1.5kg	

### ◆ 产品特点/Product features

- ◇ 外壳采用优质铝合金压铸成型，强度高；表面高压静电粉末喷涂处理，耐腐蚀。
- ◇ 采用PC灯罩，抗强力冲击、耐低温、抗老化、透光性好。
- ◇ 选用国际知名品牌LED光源，光效高、显色性高、光衰小、能耗低，超长使用寿命，免维护，无需后续使用成本。
- ◇ 灯具内装高能无记忆锂电池及控制板，当电源断开时可切换到应急状态。
- ◇ 灯具内部设有过充电保护、过放电保护及短路保护，确保灯具正常工作。
- ◇ 灯具设有状态指示灯，接通市电时，绿色指示灯亮；对蓄电池进行充电时，红色指示灯亮；当灯具出现故障时，黄色指示灯亮同时有蜂鸣器报警，故障排除报警自动解除。
- ◇ 灯具在接通电源状态下，能自动完成月检、年检；通过测试轻触按钮可以手动完成月检、年检及关灯动作。
- ◇ 灯头可向下调整45度，方便用户调整照明角度。
- ◇ Die-casting high quality aluminum alloy enclosure, with powder coated surface, corrosion resistance.
- ◇ Imported PC lampshade, with strong impact resistance, low temperature resistance, anti-aging and good light transmittance
- ◇ International brand LED lamp, high luminous efficiency, high color rendering, low luminous decay, low energy consumption, long service life, maintenance-free, no subsequent cost.
- ◇ Built-in high energy memoryless lithium battery and control panel; When the power source is cut off, it will be switched to emergency state.
- ◇ With overcharging and over discharging protection and short circuit protection to ensure the normal working of light fitting
- ◇ Equipped with status indicator lamp; when connecting to the mains supply, the green indicator is lighted. When the storage battery is charging, the red indicator is lighted. If a failure is happens on the light fitting, the yellow indicator lighted and the buzzer alarms. When the fault is solved, the alarm will be closed automatically.
- ◇ After connecting to the power source, monthly inspection and annual inspection will be performed automatically. Touch the button to finish the monthly inspection and annual inspection, and turn off the lamp.
- ◇ The lamp cap can be adjusted downward of 45°, convenient for adjusting the illumination angle by user.

### ◆ 外形及安装举例/Outline and mounting type (mm)

