




Product model	HR3101-18	HR3101-36
LED quantity	18PCS	
Power	18W	36W
Voltage	ACDC24V/AC220V	
Single LED power	1-3W	
Working life	> 50000H	
LED color	RGB three-in-one discoloration, red, yellow, blue, green, white	
Color effect	chasing, watercourse, 256 grayscale, full color	
Beam angle	optional: 6°/10°/15°/25°/40°/60°	
LED driving method	constant current driving : 330mA	
Protection degree	IP65	
Electrical safety level	DC24V Category III/AC220V Category I	
Power line	DC24V 2*1.5mm ² rubber thread /AC220V 3*0.75mm ² rubber thread	
Signal line	2*0.35+1*0.5mm ² signal connector	
Controlling method	standard DMX512	
Ambient temperature	-25°C ~ +55°C	



HR3101 LED SQUARE PROJECT LAMP

18W / 36W

Product Dimension :

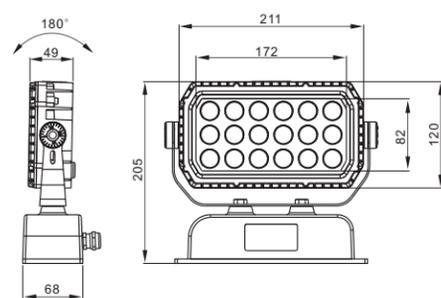

Specifications for Fixation Clamp and Bracket :

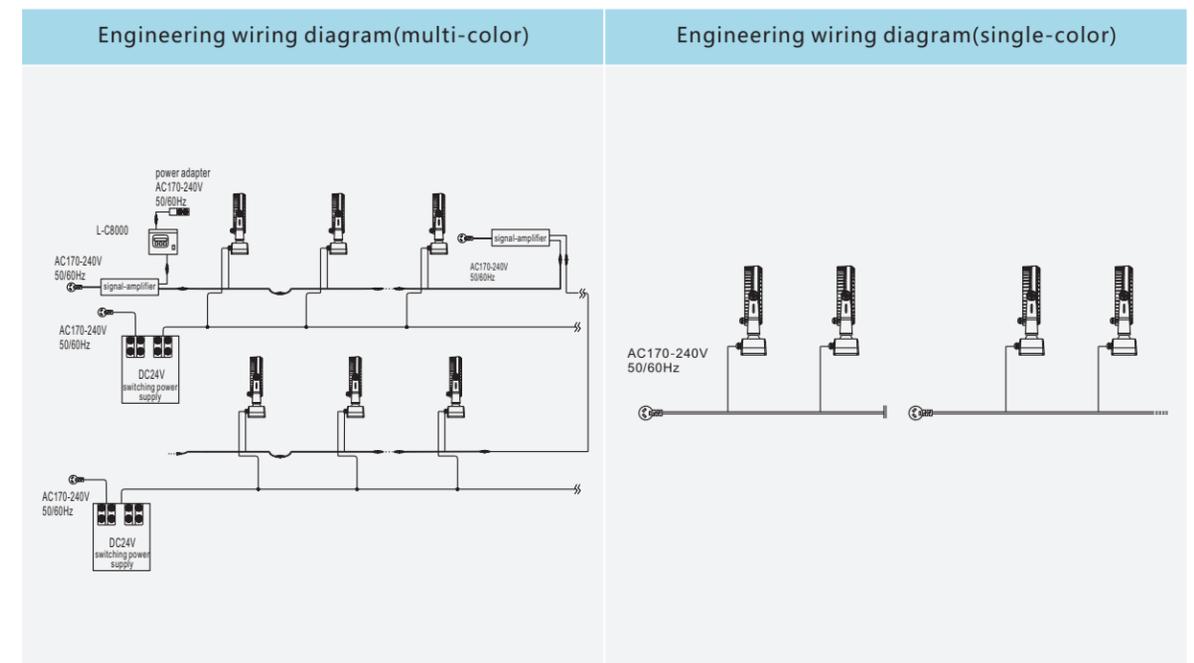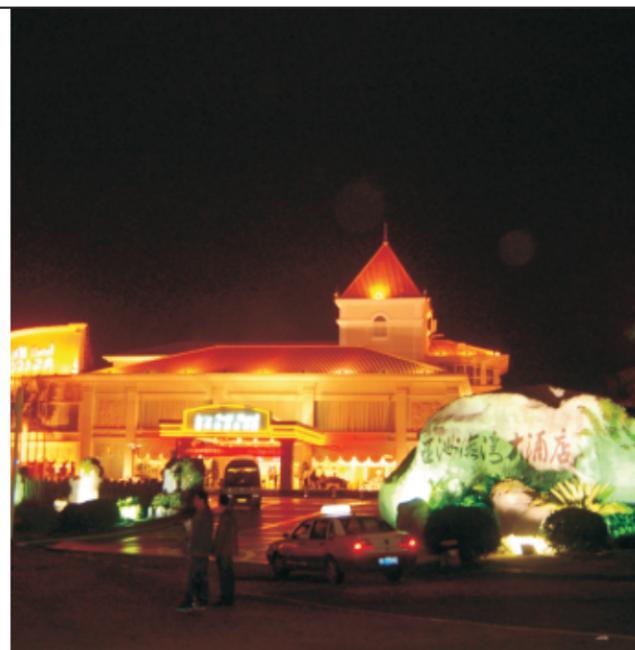




Product model	HR3101-36	HR3101-54
LED quantity	36PCS	
Power	36W	54W
Voltage	ACDC24V/AC220V	
Single LED power	1-3W	
Working life	> 50000H	
LED color	RGB three-in-one discoloration, red, yellow, blue, green, white	
Color effect	chasing, watercourse, 256 grayscale, full color	
Beam angle	optional: 6°/10°/15°/25°/40°/60°	
LED driving method	constant current driving : 330mA	
Protection degree	IP65	
Electrical safety level	DC24V Category III/AC220V Category I	
Power line	DC24V 2*1.5mm ² rubber thread /AC220V 3*0.75mm ² rubber thread	
Signal line	2*0.35+1*0.5mm ² signal connector	
Controlling method	standard DMX512	
Ambient temperature	-25°C ~ +55°C	

HR3101 LED SQUARE PROJECT LAMP

36W / 54W


Product Dimension :

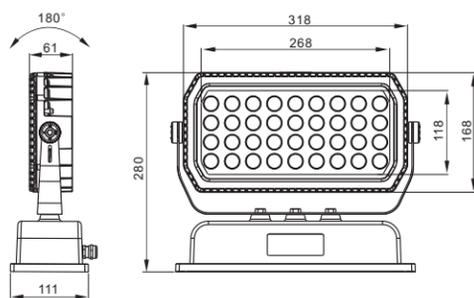


Specifications for Fixation Clamp and Bracket :



Engineering wiring diagram(multi-color)

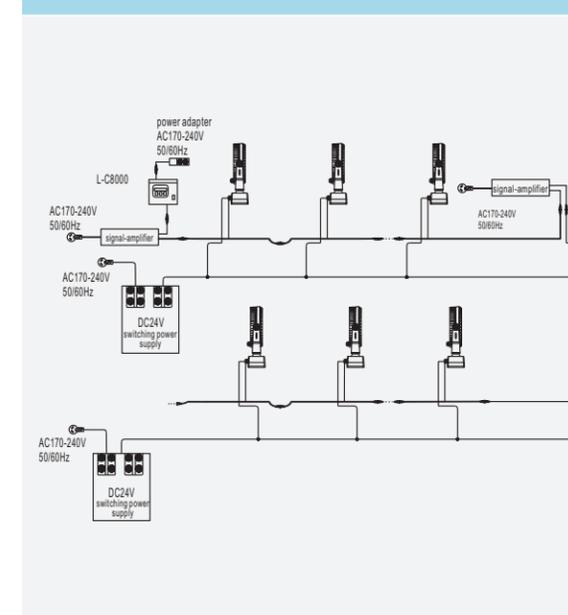

Engineering wiring diagram(single-color)

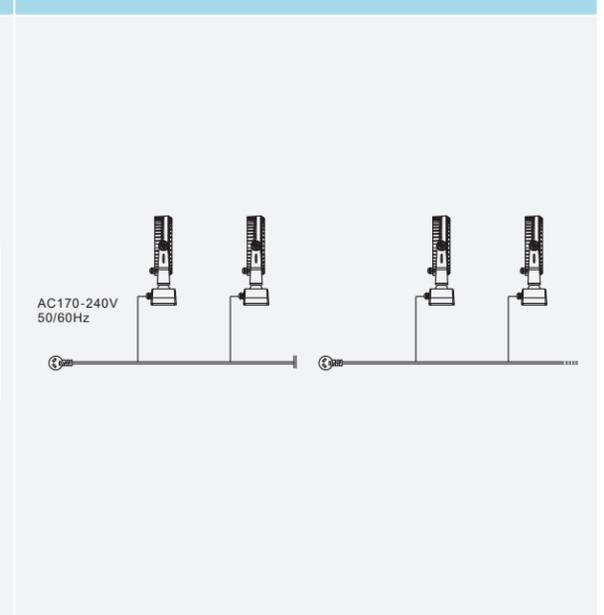




Product model	HR3101-54	HR3101-72
LED quantity	54PCS	
Power	54W	72W
Voltage	ACDC24V/AC220V	
Single LED power	1-3W	
Working life	> 50000H	
LED color	RGB three-in-one discoloration, red, yellow, blue, green, white	
Color effect	chasing, watercourse, 256 grayscale, full color	
Beam angle	optional: 6°/10°/15°/25°/40°/60°	
LED driving method	constant current driving : 330mA	
Protection degree	IP65	
Electrical safety level	DC24V Category III/AC220V Category I	
Power line	DC24V 2*1.5mm ² rubber thread /AC220V 3*0.75mm ² rubber thread	
Signal line	2*0.35+1*0.5mm ² signal connector	
Controlling method	standard DMX512	
Ambient temperature	-25°C ~ +55°C	

HR3101 LED SQUARE PROJECT LAMP

54W / 72W

Product Dimension :

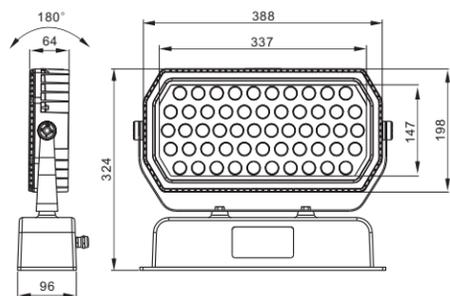

Specifications for Fixation Clamp and Bracket :

